

FAWN TOWNSHIP
YORK COUNTY, PENNSYLVANIA

ORDINANCE NO 4-2023

AN ORDINANCE OF FAWN TOWNSHIP, YORK COUNTY, PENNSYLVANIA, AMENDING
THE STORMWATER MANAGEMENT ORDINANCE, ORDINANCE
NO. 6-2002

WHEREAS, the Fawn Township Stormwater Management Ordinance, Ordinance No. 6-2002, was adopted on September 9, 2002; and

WHEREAS, the Stormwater Management Ordinance was amended by Ordinance No. 2-2019 revising Figure 1 of said ordinance; and

WHEREAS, the Fawn Township Board of Supervisors desire to amend the Stormwater Management Ordinance.

NOW, THEREFORE, BE IT ENACTED AND ORDAINED by the Board of Supervisors of Fawn Township that the Stormwater Management Ordinance is amended as follows:

SECTION 1: Amendment to Section 104 and Section 306. Section 104 and Section 306 shall be amended to replace the phrase East Hopewell with Fawn Township.

SECTION 2: Amendment to Figure 1. Figure 1 of Ordinance No. 6-2002 and Ordinance No. 2-2019 shall be removed and replaced with Figure 1 attached hereto and made a part thereof.

SECTION 3: Severability. If any sentence, clause, section or part of this Ordinance is for any reason found to be unconstitutional, illegal or invalid, such unconstitutionality, illegality or invalidity shall not affect or impair any of the remaining provisions, sentences, clauses, sections or parts of this Ordinance.


SECTION 4: Repealer. Any and all ordinances or parts thereof inconsistent herewith are hereby repealed in whole or in part.


SECTION 5: Effective Date. This Ordinance shall become effective immediately.


ENACTED AND ORDAINED THIS 8th day of May 2023.

ATTEST:

FAWN TOWNSHIP BOARD
OF SUPERVISORS


Secretary

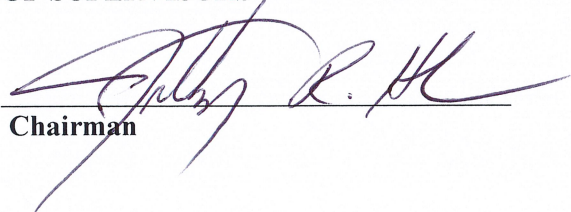

Chairman

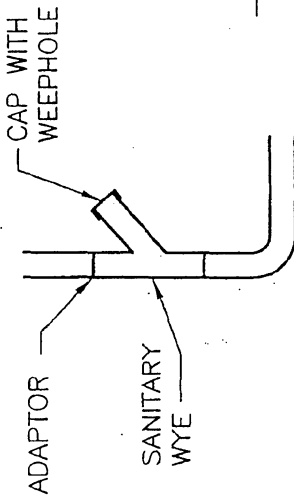

ALTERNATE

MIN. 10' FROM DWELLING WALL
 * AASHTO #1 (PENNDOT #4) STONE

VOLUME REQUIRED:
 1 CU. FT. OF SEEPAGE
 PIT FOR EVERY 2 SQ. FT. OF
 VERTICALLY PROJECTED ROOF
 AREA OR AS SPECIFIED BY
 THE DESIGNATED PERMIT
 OFFICER, DUE TO SITE
 CONDITIONS.

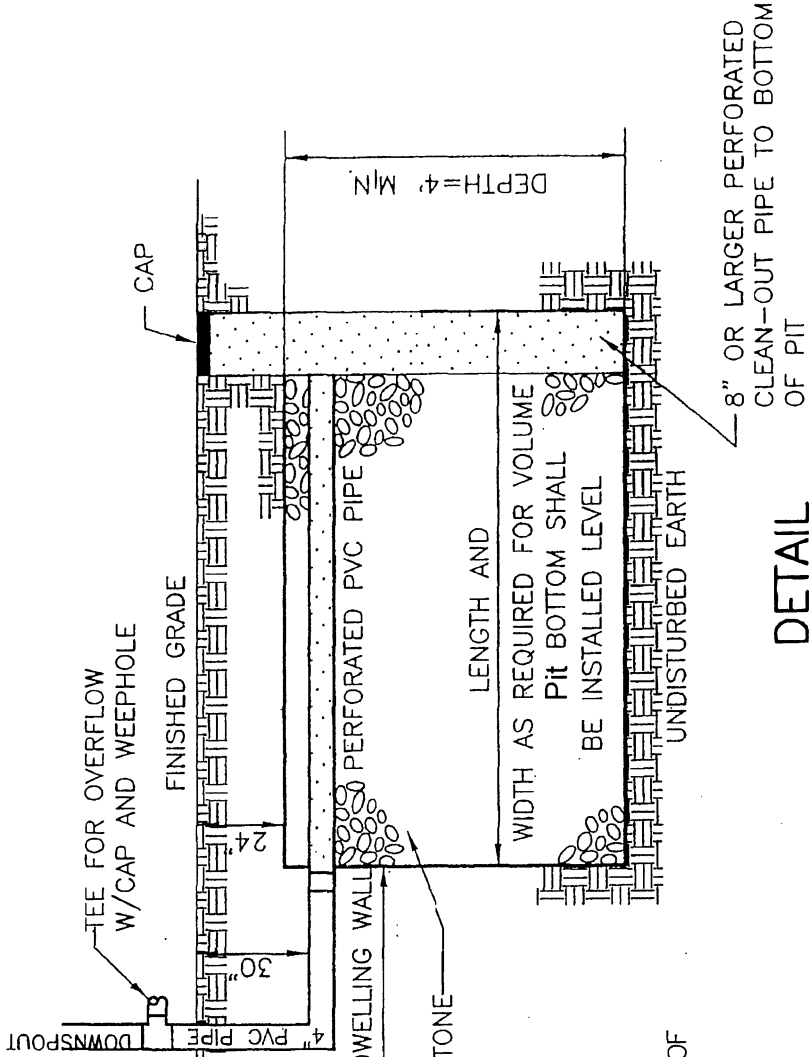

DETAIL
TYP. ROOF DRAIN SEEPAGE PIT

SCALE: NONE
 EXCEPT FOR THE BOTTOM OF THE PIT, THE PIT SHALL BE LINED WITH PADOT
 CLASS 1 GEOTEXTILE MATERIAL PER PUBLICATION 408, SECTION 212.3b.
 ALLOW 1' OVERLAP ACROSS BACKFILL AT TOP OF pit AND ALSO AN
 OVERLAP OF 1' AT END OF ROLLS.
 ALL DWELLINGS MUST UTILIZE ROOF DRAIN SEEPAGE PITS. A PERC TEST BY
 THE SEWAGE ENFORCEMENT OFFICER MAY BE REQUIRED.

* TOP 12" OF STONE MAY
 BE 3/4" IN SIZE TO AID IN
 PIPE INSTALLATION

FIGURE 1